

# OLYMPUS EUROMAX

## SPECIFICATIONS


	OL16W	OL17W	OL19W	OL20W	OL21W	OL23W	OL27W
Bags & Bulky Waste							
EN 840-1   120-360L							
EN 840-2   500-770L							
EN 840-2   1000-1200L							
EN 840-3   770-1300L							
EN 840-4   750-1600L							
EN 12574-1   2,5/5m³							
Type	OL16W	OL17W	OL19W	OL20W	OL21W	OL23W	OL27W
GVW (tonne)	18-26	18-26	19-28	26-28	26-28	26-28	26-36
Body volume (m3)	17.5	18.2	20.5	21.5	23.3	25.1	28.4
Recommended wheelbase (mm)	4050	4300	4700	4800	5300	5600	6400
Body weight (kg)	5911	6032	6162	6220	6340	6502	6780
Body length (mm)	5975	6065	6625	6785	7225	7625	8325

- Also available as High Plus version
- Volumes from 10m3 to 29m3

Olympus Press body	Width	Bin lift	
Maximum width outside dimensions (mm)	2530	Cycle time 2 wheeled	7 s
Throw in width (mm)	1800	Cycle time 4 wheeled	10/23 s
Volume rear loader with hopper plate at 1.050mm (m3)	1.5	Lifting capacity 2 wheeled	150 kg
Volume rear loader with hopper plate at 1.650mm (m3)	2.7	Lifting capacity 4 wheeled	750 kg
Volume hopper (m3)	2.8	Lifting capacity Euro-containers	2000 kg
Cycle time press plate (s)	18	Hydraulic operated hopper plate	●
Processing speed (m3/min)	9.2	Footboard	■

- Standard / ■ Option
- \* Containers with different sizes on request
- \* All dimensions and weights with a tolerance of ± 3%



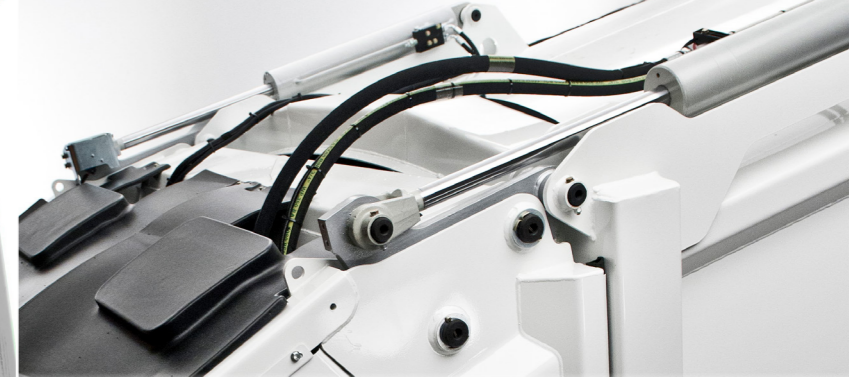

**THE EUROMAX FROM TERBERG.....  
MAXIMUM PERFORMANCE, MINIMAL FUSS.**

- Short overhang of 40cm to optimise weight distribution
- Steep container tipping angle ensures a full container discharge
- Hydraulically operated folding hopper plate provides full width opening
- Low rake rail which is ideal for collecting of loose bags and bulky items
- Container lid catcher mechanism cleverly designed for all containers
- Footboards and handrail system compliant with EN 1501-1
- Innovative Euro-container pick up system



**LARGE SIDE MOUNTED INSPECTION DOOR TO THE SIDE OF THE REFUSE BODY.**

This allows easy access for cleaning and safe maintenance work.  
A foldable step with handles is optionally available.

**Roof mounted hopper lift rams for opening and closing of the press mechanism.**

The risk of damage is significantly reduced during emptying thanks to the roof mounted hopper lift rams and one-piece body hopper seal.

**Control panel with monitor reveals all possibilities at a glance.**

The driver can simply choose which function they require on screen.  
Discharging of the vehicle body can be performed from the safety of the cab



**Full width hydraulic Hopper plate.**

Allows safe and easy loading at the press of a button.

**Superb tip angle of 55 degrees.**

The high tip angle ensures materials are discharged from containers consistently.

**Smooth-sided one-piece construction.**

Easy to clean and perfect for advertising campaigns.

**Safe container pick-up.**

Designed with a unique pick-up system for containers.

**Optimum waste processing capacity.**

The quick working press mechanism guarantees a high productivity even with larger Euro-containers.

**Optimised overhang of 40 cm.**

Some clever thinking with weight distribution in mind resulted in a short, optimal overhang.

**Safe standing.**

The Olympus EuroMAX footboards are fully compliant with EN1501-1 to give a perfect and safe standing position.

